



Well Name: RU 33-6  
Surface Location: RU 34-6 Pad  
North American Datum 1983 , US State Plane 1983 , Colorado Central Zone  
Ground Elevation: 7537.00

+N/-S  
0.00

+E/-W  
0.00

Northing  
1603588.40


Easting  
2346569.00

Latitude  
39.467766




Longitude  
-107.814807

Slot  
B05

KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)

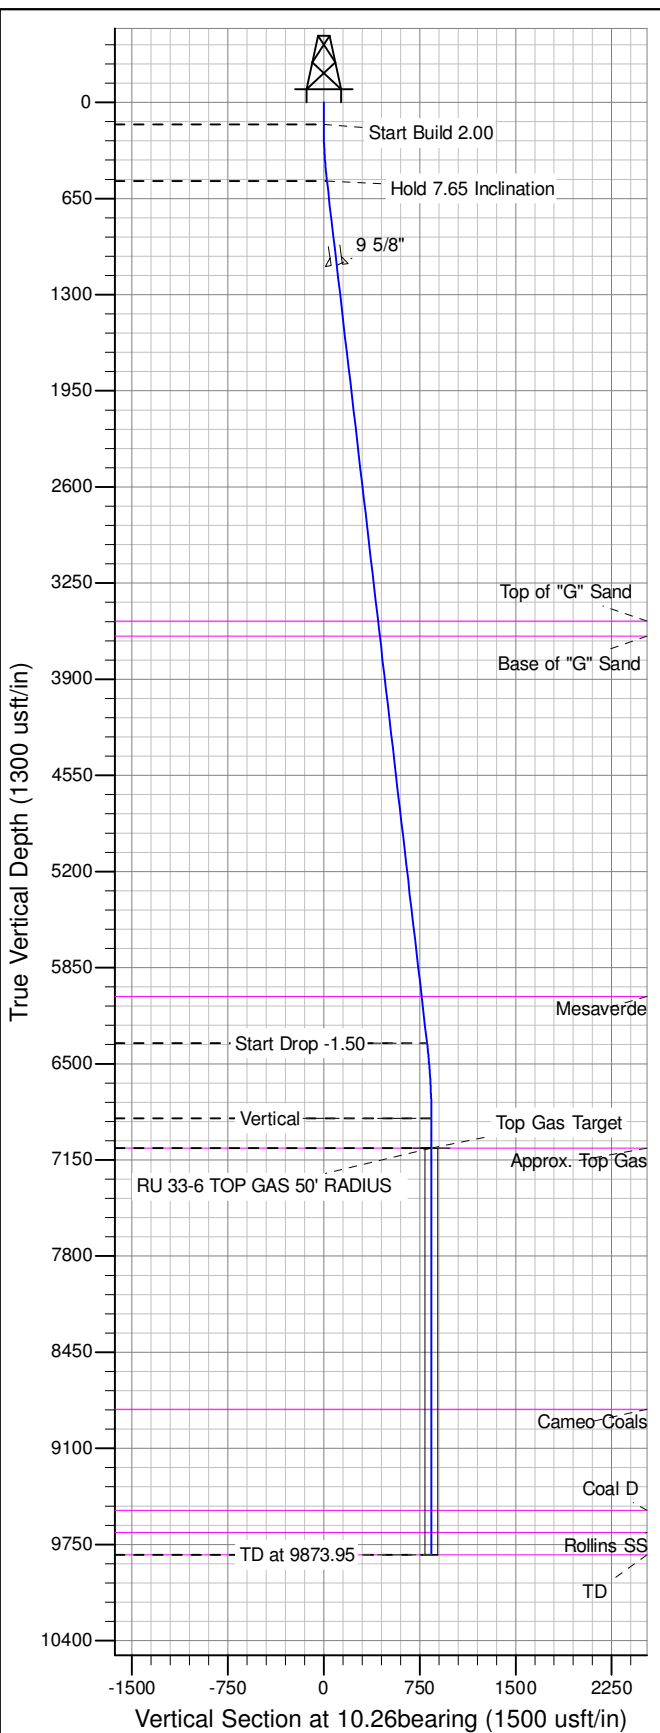

ANNOTATIONS									
TVD	MD	Inc	Azi	+N/-S	+E/-W	Vsect	Departure	Annotation	
150.00	150.00	0.00	0.00	0.00	0.00	0.00	0.00	Start Build	2.00
531.20	532.33	7.65	10.26	25.07	4.54	25.48	25.48	Hold 7.65 Inclination	
6360.73	6414.17	7.65	10.26	795.20	143.99	808.14	808.14	Start Drop	-1.50
6869.00	6923.95	0.00	0.00	828.63	150.04	842.10	842.10	Vertical	
7069.00	7123.95	0.00	0.00	828.63	150.04	842.10	842.10	Top Gas Target	
9819.00	9873.95	0.00	0.00	828.63	150.04	842.10	842.10	TD at 9873.95	

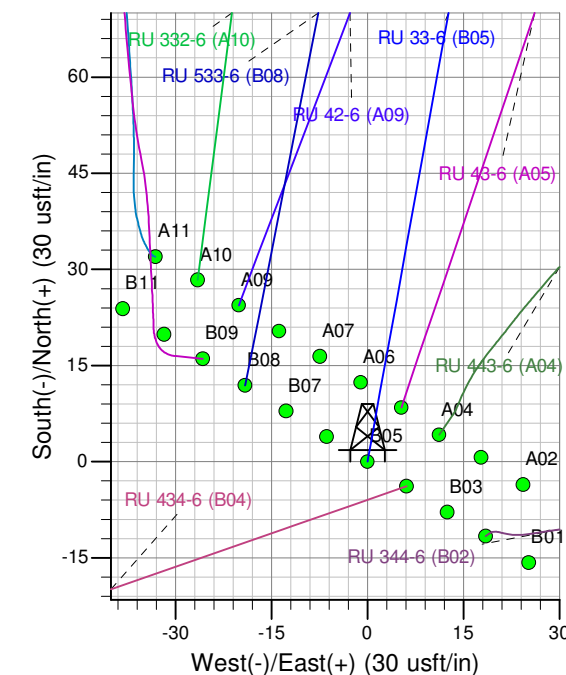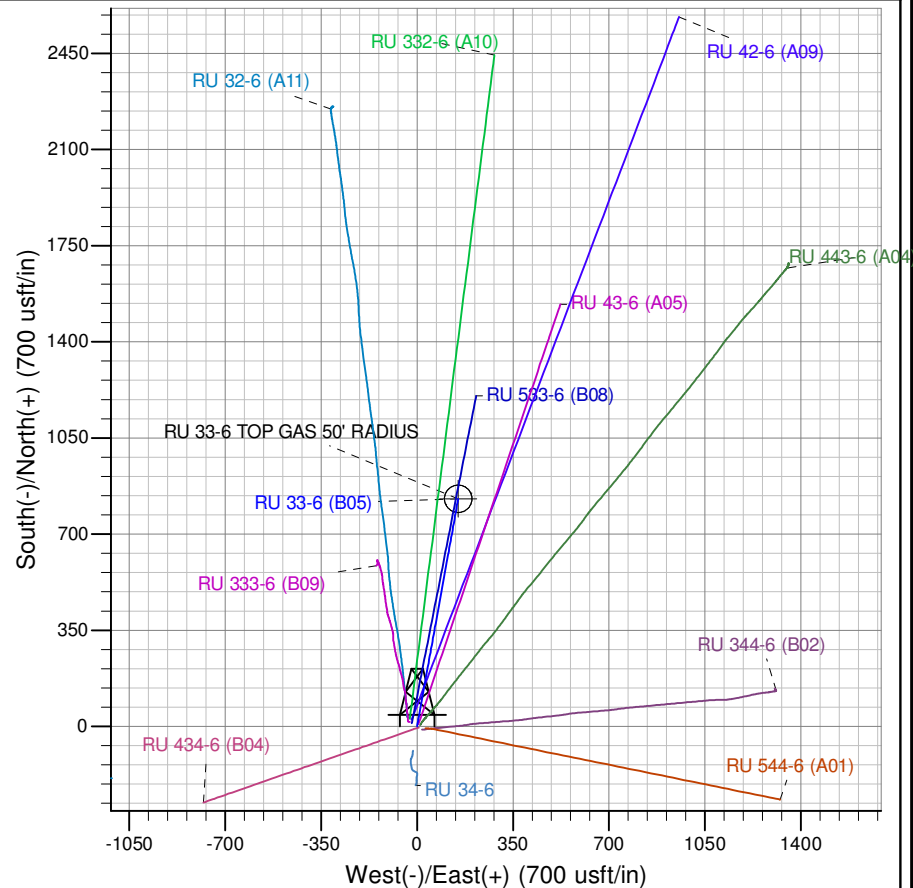

Project: RU 06-07S-093W  
Site: RU 34-6 Pad  
Well: RU 33-6  
Plan #5 12May15 sam

# **PICEANCE VLY NAD 83**

**RU 06-07S-093W**

**RU 34-6 Pad**

**RU 33-6 - Slot B05**

**Wellbore #1**

**Plan: Plan #5 12May15 sam**

## **Standard Planning Report**

**14 May, 2015**

# WPX

## Planning Report

<b>Database:</b>	COMPASS-PICEANCE	<b>Local Co-ordinate Reference:</b>	Well RU 33-6 (B05) - Slot B05
<b>Company:</b>	PICEANCE VLY NAD 83	<b>TVD Reference:</b>	KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)
<b>Project:</b>	RU 06-07S-093W	<b>MD Reference:</b>	KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)
<b>Site:</b>	RU 34-6 Pad	<b>North Reference:</b>	True
<b>Well:</b>	RU 33-6	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Plan #5 12May15 sam		

<b>Project</b>	RU 06-07S-093W		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Colorado Central Zone		Using geodetic scale factor

<b>Site</b>	RU 34-6 Pad		
<b>Site Position:</b>		<b>Northing:</b>	1,603,613.20 usft
<b>From:</b>	Map	<b>Easting:</b>	2,346,531.50 usft
<b>Position Uncertainty:</b>	0.00 usft	<b>Slot Radius:</b>	13.200 in
		<b>Latitude:</b>	39.467832
		<b>Longitude:</b>	-107.814942
		<b>Grid Convergence:</b>	-1.46 °

<b>Well</b>	RU 33-6 - Slot B05		
<b>Well Position</b>	<b>+N/-S</b>	-23.84 usft	<b>Northing:</b>
	<b>+E/-W</b>	38.12 usft	<b>Easting:</b>
<b>Position Uncertainty</b>	0.00 usft		<b>Wellhead Elevation:</b>
			<b>Latitude:</b>
			<b>Longitude:</b>
			<b>Ground Level:</b>

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	2/11/2015	9.79	65.65	51,876

<b>Design</b>	Plan #5 12May15 sam			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (bearing)</b>
	0.00	0.00	0.00	10.26

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (bearing)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150.00	0.00	0.00	150.00	0.00	0.00	0.00	0.00	0.00	0.00	
532.33	7.65	10.26	531.20	25.07	4.54	2.00	2.00	0.00	10.26	
6,414.17	7.65	10.26	6,360.73	795.20	143.99	0.00	0.00	0.00	0.00	
6,923.95	0.00	0.00	6,869.00	828.63	150.04	1.50	-1.50	0.00	180.00	
7,123.95	0.00	0.00	7,069.00	828.63	150.04	0.00	0.00	0.00	0.00	RU 33-6 TOP GAS 5C
9,873.95	0.00	0.00	9,819.00	828.63	150.04	0.00	0.00	0.00	0.00	

# WPX

## Planning Report

<b>Database:</b>	COMPASS-PICEANCE	<b>Local Co-ordinate Reference:</b>	Well RU 33-6 (B05) - Slot B05
<b>Company:</b>	PICEANCE VLY NAD 83	<b>TVD Reference:</b>	KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)
<b>Project:</b>	RU 06-07S-093W	<b>MD Reference:</b>	KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)
<b>Site:</b>	RU 34-6 Pad	<b>North Reference:</b>	True
<b>Well:</b>	RU 33-6	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Plan #5 12May15 sam		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150.00	0.00	0.00	150.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
532.33	7.65	10.26	531.20	25.07	4.54	25.48	2.00	2.00	0.00
Hold 7.65 Inclination									
1,106.24	7.65	10.26	1,100.00	100.21	18.15	101.84	0.00	0.00	0.00
9 5/8"									
3,534.83	7.65	10.26	3,507.00	418.20	75.73	425.00	0.00	0.00	0.00
Top of "G" Sand									
3,636.74	7.65	10.26	3,608.00	431.54	78.14	438.56	0.00	0.00	0.00
Base of "G" Sand									
6,093.59	7.65	10.26	6,043.00	753.23	136.39	765.48	0.00	0.00	0.00
Mesaverde									
6,414.17	7.65	10.26	6,360.73	795.20	143.99	808.14	0.00	0.00	0.00
Start Drop -1.50									
6,923.95	0.00	0.00	6,869.00	828.63	150.04	842.10	1.50	-1.50	0.00
Vertical									
7,123.95	0.00	0.00	7,069.00	828.63	150.04	842.10	0.00	0.00	0.00
Top Gas Target - Approx. Top Gas									
8,888.95	0.00	0.00	8,834.00	828.63	150.04	842.10	0.00	0.00	0.00
Cameo Coals									
9,572.95	0.00	0.00	9,518.00	828.63	150.04	842.10	0.00	0.00	0.00
Coal D									
9,723.95	0.00	0.00	9,669.00	828.63	150.04	842.10	0.00	0.00	0.00
Rollins SS									
9,873.95	0.00	0.00	9,819.00	828.63	150.04	842.10	0.00	0.00	0.00
TD at 9873.95 - TD									

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (bearing)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude		Longitude
RU 33-6 TOP GAS 50' F - plan hits target center - Circle (radius 50.00)	0.00	0.00	7,069.00	828.63	150.04	1,604,412.90	2,346,740.10	39.470041		-107.814276

Casing Points						
Measured Depth (usft)	Vertical Depth (usft)	Name			Casing Diameter (in)	Hole Diameter (in)
1,106.24	1,100.00	9 5/8"			9.625	13.500

# WPX

## Planning Report

<b>Database:</b>	COMPASS-PICEANCE	<b>Local Co-ordinate Reference:</b>	Well RU 33-6 (B05) - Slot B05
<b>Company:</b>	PICEANCE VLY NAD 83	<b>TVD Reference:</b>	KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)
<b>Project:</b>	RU 06-07S-093W	<b>MD Reference:</b>	KELLY BUSHING @ 7563.00usft (Nabors 574 (26' RKB) mab)
<b>Site:</b>	RU 34-6 Pad	<b>North Reference:</b>	True
<b>Well:</b>	RU 33-6	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Plan #5 12May15 sam		

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (bearing)
3,534.83	3,507.00	Top of "G" Sand		0.00	
3,636.74	3,608.00	Base of "G" Sand		0.00	
6,093.59	6,043.00	Mesaverde		0.00	
7,123.95	7,069.00	Approx. Top Gas		0.00	
8,888.95	8,834.00	Cameo Coals		0.00	
9,572.95	9,518.00	Coal D		0.00	
9,723.95	9,669.00	Rollins SS		0.00	
9,873.95	9,819.00	TD		0.00	

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
150.00	150.00	0.00	0.00	Start Build 2.00
532.33	531.20	25.07	4.54	Hold 7.65 Inclination
6,414.17	6,360.73	795.20	143.99	Start Drop -1.50
6,923.95	6,869.00	828.63	150.04	Vertical
7,123.95	7,069.00	828.63	150.04	Top Gas Target
9,873.95	9,819.00	828.63	150.04	TD at 9873.95