

## **P&A Procedure for Evacuation Creek 7606**

31-4S-102W Rio Blanco County, Colo

8 5/8" @ 937' TOC at Surface

4 1/2" 11.6# @ 5,510' TOC 3,606' CBL

Tubing: 2 3/8" at 4,887'

Perfs: 4,858'-4,924'

MIRU

NDWH, NUBOP

POH and check tubing visually

RIH with bit 50' above perfs at 4,808'

POH

RIH with CIBP and set at same depth

Spot 20 sxs on CIBP (256' in 4 1/2" casing)

Roll hole with produced water

Pressure test casing, if it fails call for orders

POH

Perforate 50' below base of surface at 987'

Establish circulation and squeeze w/ 145 sx to surface leaving 50'  
cement above surface shoe. WOC and tag cement plug

NDBOP

TIH to 100' circulate cement to surface

Cut off the wellhead

Weld a plate with well information

RDMO

All cement is 15.8# class G neat with a 1.15 cuft/sack yield

**Well Name:** Evacuation Creek 7606

**API #:** 05103082570000

**Location:** Sec. 31-4S-102W

**KB:** 8,656' (9' AGL)


**GL:** 8,647'

**County/St:** Rio Blanco, CO

**Created By:** M. Bale

**Date:** 4/2/2012

**Current Wellbore**

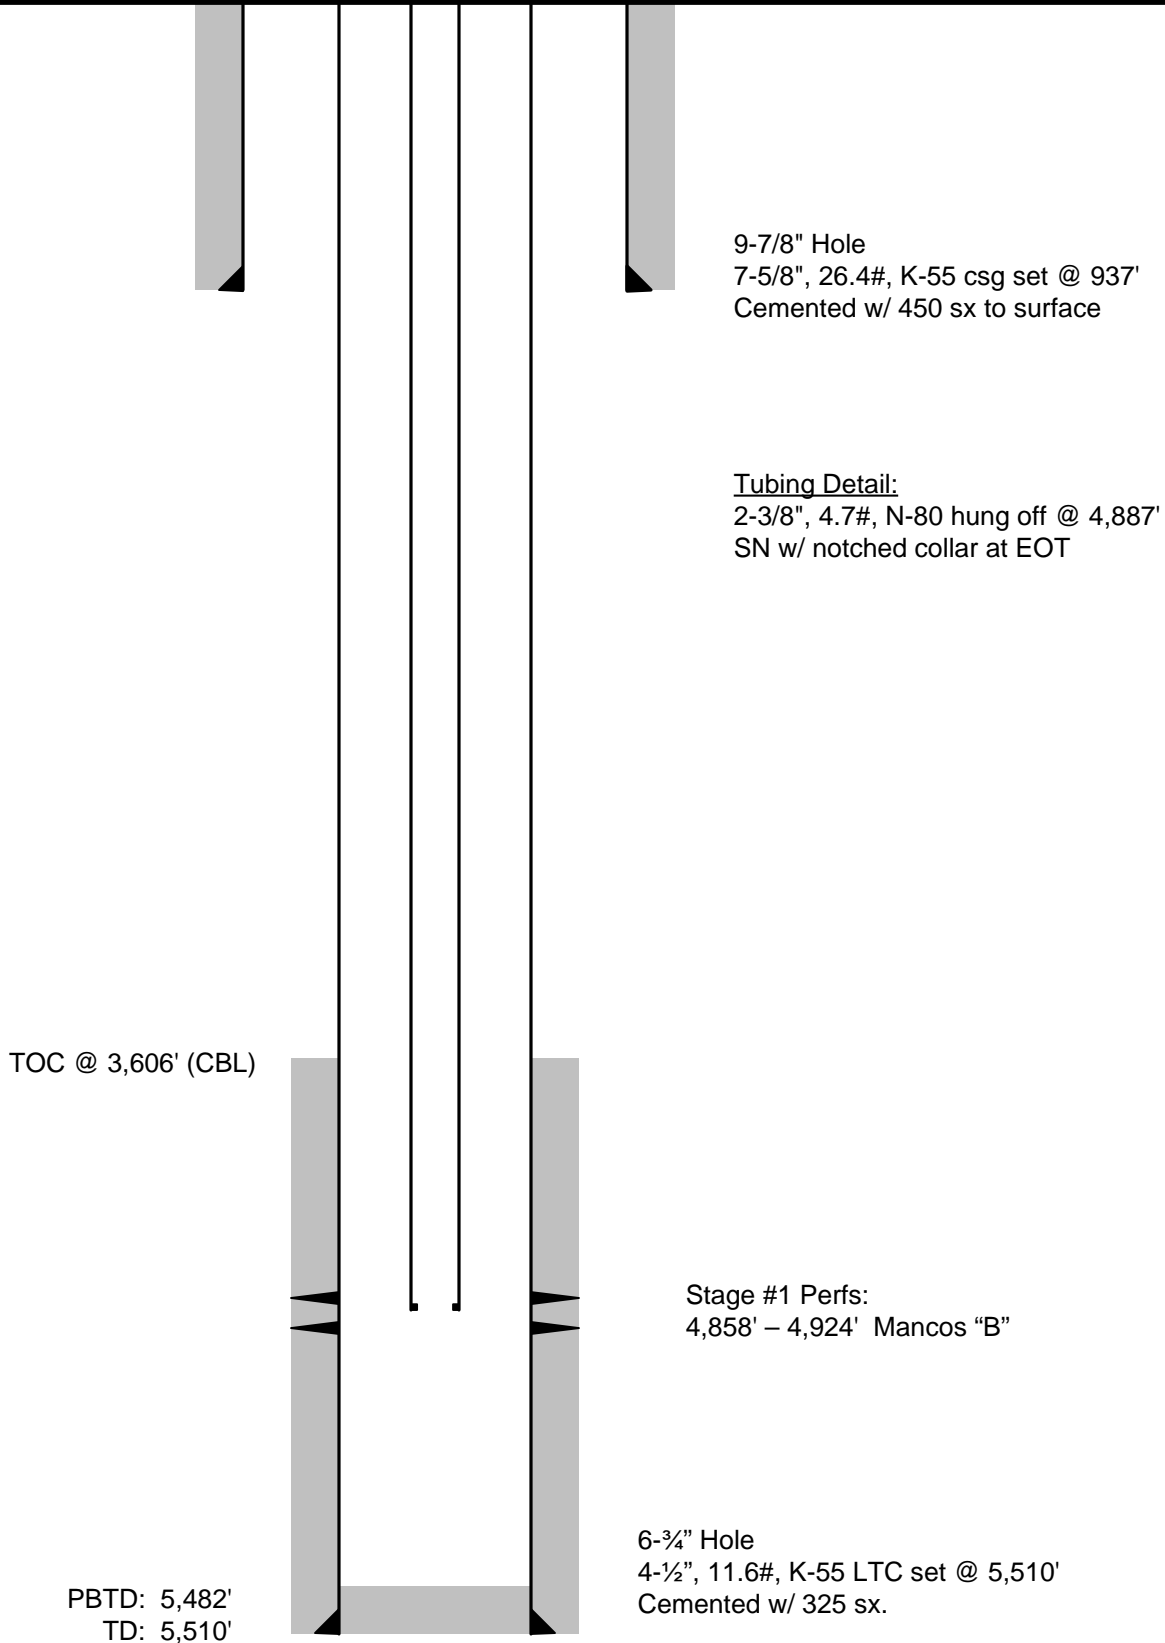

**Well Name:** Evacuation Creek 7606

**API #:** 05103082570000

**Location:** Sec. 31-4S-102W

**KB:** 8,656' (9' AGL)

**GL:** 8,647'

**County/St:** Rio Blanco, CO

**Created By:** M. Bale

**Date:** 4/2/2012

### Proposed Wellbore

