


COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS



00252000

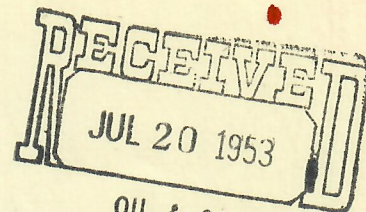

OIL & GAS
CONSERVATION COMMISSION

(Indicate nature of data by checking below)

Notice of intention to drill _____
 Notice of intention to change plans _____
 Notice of date for test of water shut-off _____
 Report on result of test of water shut-off _____
 Notice of intention to re-drill or repair well _____
 Notice of intention to clean out well _____
 Statement of shooting _____
 Statement of perforating _____
 Notice to pull or otherwise alter casing _____
 Notice of intention to abandon well _____
 Report of work done on well since previous report x _____

Following is a ~~(notice of intention to do work)~~ (On-land) July 16 1953
 (report of work done) (patented) described as follows:

<u>Colorado</u>	<u>Logan</u>	<u>Dale</u>
State	County	Field

<u>2-A</u>	<u>J. Knifton 'A'</u>	<u>NW/4</u>	<u>23</u>	<u>8N</u>	<u>53W</u>	
(Well No.)	(Lease)	(Sec. and $\frac{1}{4}$ Sec.)		(Twp.)	(Range)	(Meridian)

The well is located 950 ft. (N) of N. Line and 987 ft. (E) of West Line of NW/4 Section 23-T8N R53W.
 (S) (W)

The elevation above sea level is 4074 ft.

Details of Plan of Work: (State names of and expected depths to objective sands:
 Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cement-
 ing points, and all other important proposed work.)

7-12-53 Plug was set at 4490 feet and capped with 3 gallons of gravel and $1\frac{1}{2}$ sacks of
 cement, to depth of 4465 feet.
 7-13-53 Shot off casing at 3610 feet.
 7-14-53 Pulling $5\frac{1}{2}$ " casing.
 7-15-53 Recovered 3629 feet of $5\frac{1}{2}$ " casing, leaving 1166 feet remaining in hole (3610
 feet to 4776 feet).

Heavy mud was placed from 4465 feet to 622 feet, with a cement plug being from
 622 feet to 592 feet (opposite the bottom of the surface casing). Heavy mud was put
 from 592 feet to 15 feet, where a plug was spotted to the surface.

P & A

Complete.

Approved:

JUL 20 1953