


API:05-081-06981

Van Schaik 1-4
Sec 24, T12N-R101W
Moffat County, Colorado

updated: 2/7/05
spud date: 9/8/00
completion date: 10/6/00

6912' KB

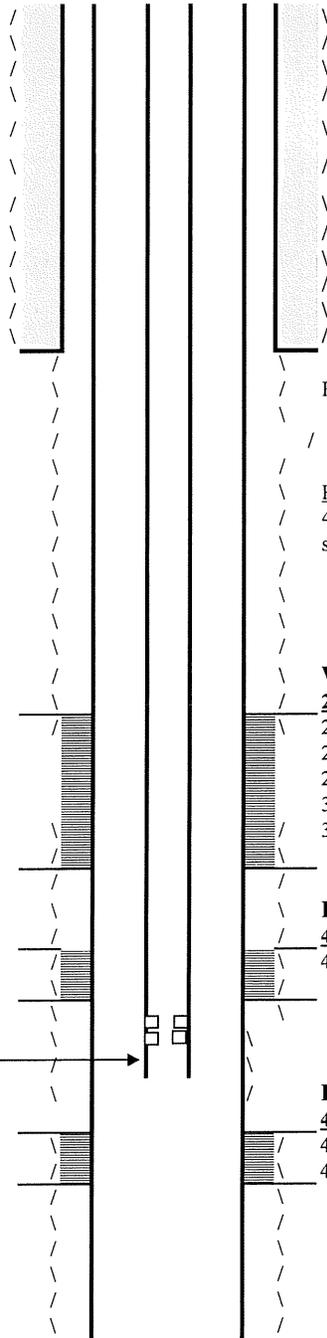

Hole Size: 11"

Surface Casing Data
8-5/8", 24#
Set @ 860' w/ 300 sx cmt

Hole Size: 7-7/8"

Production Casing Data:
4-1/2", 11.6#, N-80
set @ 4750' w/ 1360 sx cmt.

Tubing Data:
2-3/8", 4.6#, L-80 tbg
set @ 4462'
X-nipple 2 jts off bottom
XN-nipple 1 jt off bottom
float collar @ 4692'
guide shoe @ 4750'

Wasatch

2118-3339

2118-2123

2740-2745

2973-2978

3060-3065

3334-3339

4 spf

treated: 379 bbls 60Q N2 foam, 45226# proppant

treated: 296 bbls 60Q N2 foam, 41774# proppant

treated: 247 bbls 60Q N2 foam, 30043# proppant

treated: 314 bbls 60Q N2 foam, 39939# proppant

treated: 255 bbls 65Q N2 foam, 30135# proppant

Ft. Union

4075-4085'

4075-4085

4 spf

treated: 568 bbls 65 Q N2 foam, 98385# proppant

Lewis

4481-4570'

4481-4485

4566-4570

4 spf

treated: 1118 bbls 65Q N2 foam, 164762# proppant

EOT = 4462'

TD = 4750'

PBTD = 4692'

* The two lower zones were conventionally frac'd and all upper zones were coil frac'd. Could not find tbg jt count in WO report.