


Well Name: Booth 28-26


Surface Location: Booth 4 Pad Sec.26-T7N-R65W
 North American Datum 1983 US State Plane 1983 Colorado Northern Zone
 Ground Elevation: 4891.0

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.0	0.0	1445211.55	3242092.77	40.552241	-104.628788	

Original Well Elev WELL @ 4907.0ft (Original Well Elev)

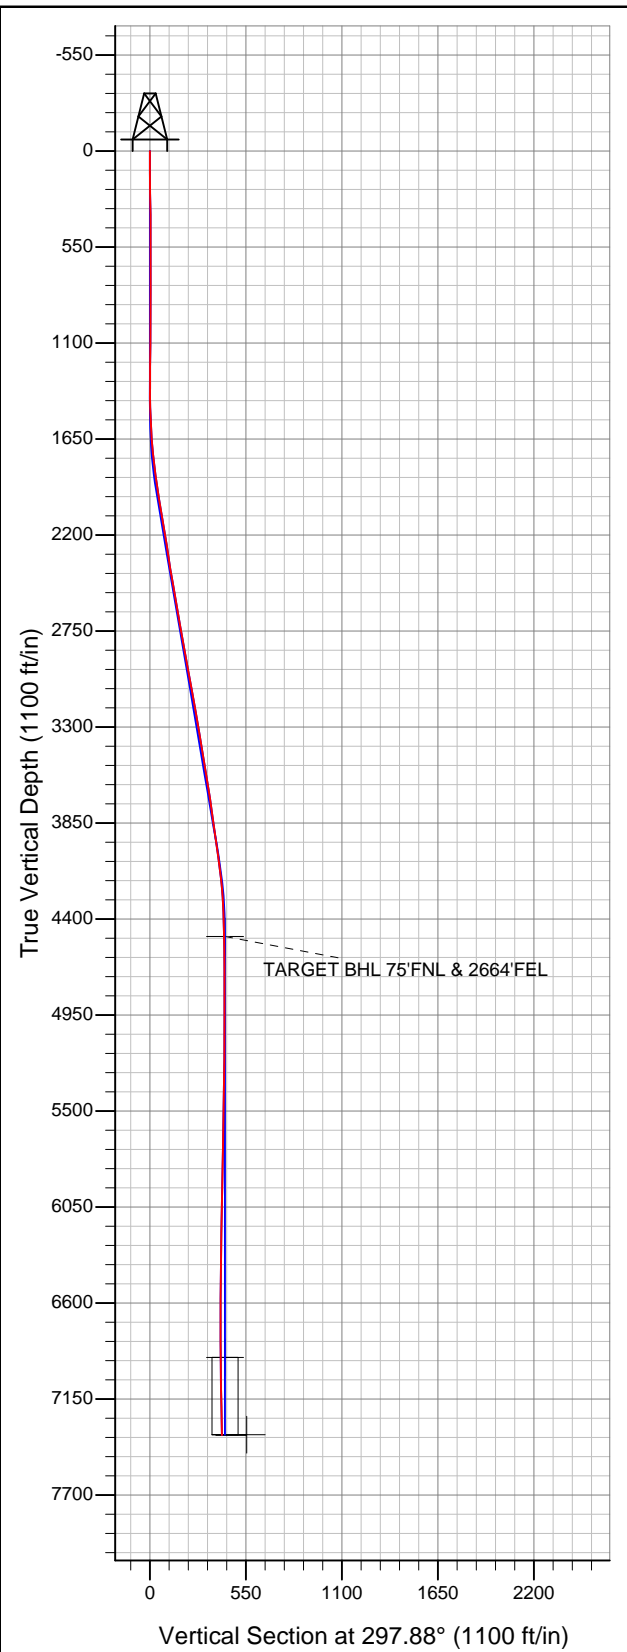

Bayswater Exploration & Production, LLC

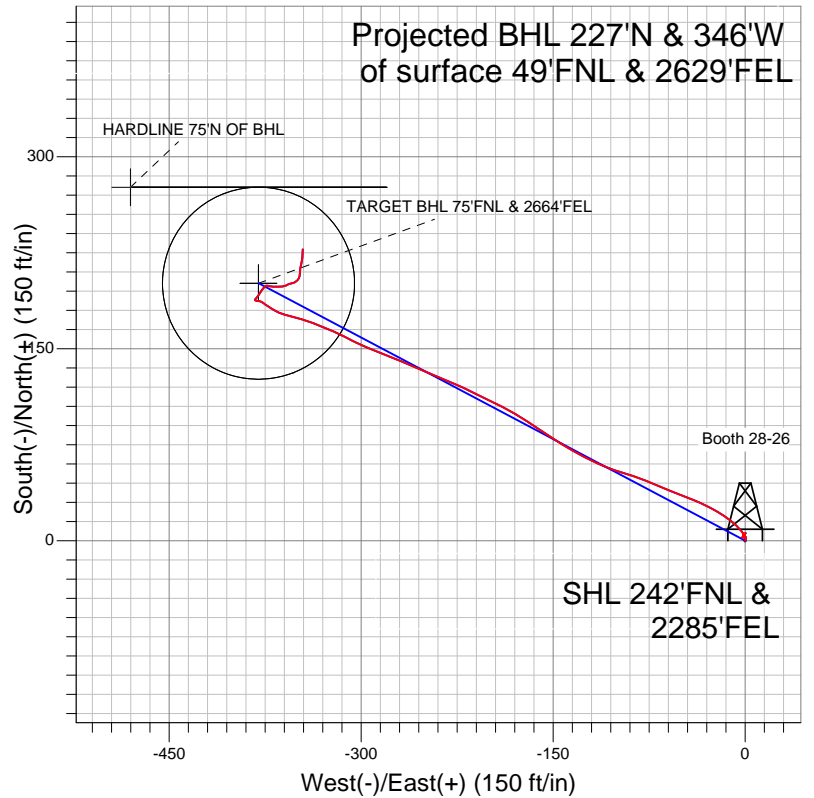

LEGEND

- Booth 28-26, Wellbore #1, Plan #1 (5-17-12) V0
- Wellbore #1
- Survey #1

Final Survey Plot

Projected Final Survey -
 7391'MD & 7357'TVD @
 411.84'VS 2.00 deg Inc 2.20 deg
 AZ

Project: SEC.26-T7N-R65W
 Site: Booth 4 Pad Sec.26-T7N-R65W
 Well: Booth 28-26
 Plan: Wellbore #1



Bayswater Exploration & Production, LLC

SEC.26-T7N-R65W

Booth 4 Pad Sec.26-T7N-R65W

Booth 28-26

Wellbore #1

Survey: Survey #1

Standard Survey Report

16 May, 2013



Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Booth 28-26
Project:	SEC.26-T7N-R65W	TVD Reference:	WELL @ 4907.0ft (Original Well Elev)
Site:	Booth 4 Pad Sec.26-T7N-R65W	MD Reference:	WELL @ 4907.0ft (Original Well Elev)
Well:	Booth 28-26	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	Landmark

Project	SEC.26-T7N-R65W, Weld County, CO		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		Using Well Reference Point
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	Booth 4 Pad Sec.26-T7N-R65W		
Site Position:		Northing:	1,445,211.57 ft
From:	Lat/Long	Easting:	3,242,092.77 ft
Position Uncertainty:	0.0 ft	Slot Radius:	"
		Latitude:	40.552241
		Longitude:	-104.628788
		Grid Convergence:	0.56 °

Well	Booth 28-26		
Well Position	+N/-S	0.0 ft	Northing: 1,445,211.55 ft
	+E/-W	0.0 ft	Easting: 3,242,092.77 ft
Position Uncertainty	0.0 ft	Wellhead Elevation:	ft
		Latitude:	40.552241
		Longitude:	-104.628788
		Ground Level:	4,891.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	5/31/2012	8.68	67.16	53,124

Design	Wellbore #1				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.0	0.0	0.0	297.88	

Survey Program	Date	5/16/2013			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
126.0	7,391.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard	

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
40.0	0.13	41.70	40.0	0.0	0.0	0.0	0.32	0.32	0.00	
80.0	0.25	41.70	80.0	0.1	0.1	0.0	0.32	0.32	0.00	
120.0	0.38	41.70	120.0	0.3	0.3	-0.1	0.32	0.32	0.00	
160.0	0.55	9.63	160.0	0.6	0.4	-0.1	0.76	0.43	-80.17	
200.0	0.84	352.35	200.0	1.1	0.4	0.1	0.89	0.72	-43.20	
240.0	1.17	344.26	240.0	1.7	0.2	0.6	0.89	0.81	-20.21	
280.0	0.97	318.46	280.0	2.4	-0.1	1.2	1.28	-0.48	-64.52	
320.0	1.02	284.61	320.0	2.8	-0.7	1.9	1.46	0.12	-84.61	
360.0	1.35	260.90	360.0	2.8	-1.5	2.6	1.46	0.82	-59.28	
400.0	0.85	250.43	400.0	2.6	-2.2	3.2	1.34	-1.25	-26.19	
440.0	0.33	205.88	440.0	2.4	-2.6	3.4	1.64	-1.29	-111.37	
480.0	0.60	121.54	480.0	2.2	-2.5	3.2	1.64	0.67	-210.85	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Booth 28-26
Project:	SEC.26-T7N-R65W	TVD Reference:	WELL @ 4907.0ft (Original Well Elev)
Site:	Booth 4 Pad Sec.26-T7N-R65W	MD Reference:	WELL @ 4907.0ft (Original Well Elev)
Well:	Booth 28-26	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	Landmark

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
520.0	0.45	80.97	520.0	2.1	-2.1	2.8	0.97	-0.38	-101.42
560.0	0.58	22.25	560.0	2.3	-1.8	2.7	1.29	0.33	-146.79
600.0	1.01	359.90	599.9	2.8	-1.8	2.9	1.29	1.06	-55.88
640.0	1.12	16.64	639.9	3.6	-1.7	3.2	0.82	0.29	41.84
680.0	1.30	36.81	679.9	4.3	-1.3	3.2	1.15	0.45	50.44
720.0	1.60	50.82	719.9	5.0	-0.6	2.9	1.15	0.74	35.01
760.0	1.01	51.84	759.9	5.6	0.2	2.5	1.47	-1.47	2.56
800.0	0.09	335.38	799.9	5.9	0.5	2.3	2.48	-2.29	-191.14
840.0	0.98	242.59	839.9	5.7	0.1	2.6	2.48	2.22	-232.00
880.0	1.25	238.11	879.9	5.3	-0.7	3.0	0.70	0.66	-11.18
920.0	0.73	226.89	919.9	4.9	-1.2	3.4	1.37	-1.29	-28.06
960.0	0.34	181.62	959.9	4.6	-1.4	3.4	1.37	-0.98	-113.16
1,000.0	0.41	128.68	999.9	4.4	-1.2	3.2	0.85	0.17	-132.36
1,040.0	0.44	132.01	1,039.9	4.2	-1.0	2.9	0.10	0.08	8.32
1,080.0	0.47	134.89	1,079.9	4.0	-0.8	2.6	0.10	0.08	7.20
1,120.0	0.50	136.80	1,119.9	3.7	-0.5	2.2	0.07	0.06	4.78
1,160.0	0.50	137.36	1,159.9	3.5	-0.3	1.9	0.01	0.00	1.40
1,200.0	0.50	137.81	1,199.9	3.2	-0.1	1.6	0.01	0.00	1.12
1,240.0	0.50	138.88	1,239.9	3.0	0.2	1.2	0.02	0.01	2.68
1,280.0	0.53	144.00	1,279.9	2.7	0.4	0.9	0.14	0.07	12.79
1,320.0	0.56	148.56	1,319.9	2.4	0.6	0.6	0.14	0.08	11.40
1,360.0	0.60	152.60	1,359.9	2.0	0.8	0.2	0.14	0.09	10.11
1,400.0	0.23	321.63	1,399.9	1.9	0.8	0.1	2.08	-0.91	422.59
1,440.0	1.06	327.79	1,439.9	2.3	0.6	0.5	2.08	2.07	15.39
1,480.0	1.90	328.55	1,479.9	3.1	0.0	1.4	2.08	2.08	1.90
1,520.0	2.42	326.25	1,519.8	4.4	-0.8	2.8	1.32	1.30	-5.74
1,560.0	2.90	324.40	1,559.8	6.0	-1.8	4.4	1.22	1.20	-4.63
1,600.0	3.38	323.07	1,599.7	7.7	-3.1	6.4	1.22	1.21	-3.31
1,640.0	4.09	317.63	1,639.6	9.7	-4.8	8.8	1.99	1.79	-13.61
1,680.0	4.92	312.73	1,679.5	11.9	-7.0	11.8	2.28	2.07	-12.26
1,720.0	5.78	309.25	1,719.3	14.4	-9.8	15.4	2.28	2.13	-8.69
1,760.0	6.41	306.31	1,759.1	17.0	-13.2	19.6	1.77	1.58	-7.36
1,800.0	6.92	303.64	1,798.8	19.6	-17.0	24.2	1.49	1.27	-6.68
1,840.0	7.44	301.33	1,838.5	22.3	-21.2	29.2	1.49	1.30	-5.76
1,880.0	7.91	298.69	1,878.2	25.0	-25.8	34.5	1.48	1.19	-6.62
1,920.0	8.35	295.71	1,917.8	27.6	-30.9	40.2	1.52	1.09	-7.44
1,960.0	8.81	293.03	1,957.3	30.0	-36.3	46.1	1.52	1.14	-6.69
2,000.0	9.14	291.56	1,996.8	32.4	-42.1	52.4	1.01	0.83	-3.68
2,040.0	9.23	291.72	2,036.3	34.7	-48.0	58.7	0.25	0.24	0.41
2,080.0	9.33	291.88	2,075.8	37.1	-54.0	65.1	0.25	0.24	0.40
2,120.0	9.41	292.06	2,115.3	39.6	-60.1	71.6	0.21	0.20	0.43
2,160.0	9.44	292.28	2,154.7	42.1	-66.1	78.1	0.12	0.08	0.56
2,200.0	9.47	292.51	2,194.2	44.6	-72.2	84.7	0.12	0.08	0.56
2,240.0	9.47	292.43	2,233.6	47.1	-78.3	91.2	0.04	-0.02	-0.19
2,280.0	9.20	290.18	2,273.1	49.4	-84.3	97.7	1.13	-0.68	-5.61
2,320.0	8.94	287.81	2,312.6	51.5	-90.3	103.9	1.13	-0.64	-5.94
2,360.0	8.70	285.30	2,352.1	53.2	-96.2	109.9	1.13	-0.60	-6.27
2,400.0	9.18	288.66	2,391.6	55.1	-102.1	116.0	1.78	1.21	8.39
2,440.0	9.70	291.67	2,431.1	57.3	-108.3	122.5	1.78	1.28	7.54
2,480.0	10.23	294.38	2,470.5	60.0	-114.6	129.4	1.78	1.34	6.77
2,520.0	10.01	295.98	2,509.9	63.1	-121.0	136.5	0.89	-0.55	4.01
2,560.0	9.69	297.54	2,549.3	66.1	-127.1	143.3	1.05	-0.81	3.90
2,600.0	9.37	299.21	2,588.7	69.3	-133.0	149.9	1.05	-0.79	4.16
2,640.0	9.54	300.67	2,628.2	72.5	-138.6	156.5	0.74	0.43	3.65

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Booth 28-26
Project:	SEC.26-T7N-R65W	TVD Reference:	WELL @ 4907.0ft (Original Well Elev)
Site:	Booth 4 Pad Sec.26-T7N-R65W	MD Reference:	WELL @ 4907.0ft (Original Well Elev)
Well:	Booth 28-26	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	Landmark

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
2,680.0	9.86	301.97	2,667.6	76.1	-144.4	163.2	0.97	0.80	3.25
2,720.0	10.19	303.19	2,707.0	79.8	-150.2	170.1	0.97	0.81	3.05
2,760.0	10.20	303.64	2,746.4	83.7	-156.2	177.2	0.20	0.03	1.12
2,800.0	10.04	303.70	2,785.7	87.6	-162.0	184.2	0.40	-0.40	0.16
2,840.0	9.88	303.77	2,825.1	91.5	-167.8	191.1	0.40	-0.40	0.16
2,880.0	9.96	302.49	2,864.5	95.2	-173.5	197.9	0.59	0.20	-3.19
2,920.0	10.27	300.11	2,903.9	98.9	-179.5	204.9	1.30	0.78	-5.95
2,960.0	10.60	297.88	2,943.3	102.4	-185.8	212.1	1.30	0.82	-5.59
3,000.0	10.75	296.58	2,982.6	105.8	-192.5	219.6	0.71	0.38	-3.25
3,040.0	10.62	296.51	3,021.9	109.1	-199.1	227.0	0.32	-0.32	-0.16
3,080.0	10.49	296.45	3,061.2	112.4	-205.7	234.3	0.32	-0.32	-0.16
3,120.0	10.31	296.12	3,100.5	115.6	-212.1	241.6	0.48	-0.46	-0.82
3,160.0	9.99	295.06	3,139.9	118.6	-218.5	248.6	0.93	-0.81	-2.66
3,200.0	9.67	293.92	3,179.3	121.4	-224.7	255.4	0.93	-0.80	-2.83
3,240.0	9.43	292.90	3,218.8	124.1	-230.8	262.0	0.72	-0.59	-2.56
3,280.0	9.66	292.90	3,258.2	126.6	-236.9	268.6	0.56	0.56	0.00
3,320.0	9.88	292.90	3,297.6	129.3	-243.1	275.4	0.56	0.56	0.00
3,360.0	10.09	292.90	3,337.0	132.0	-249.5	282.3	0.53	0.53	0.01
3,400.0	9.77	293.02	3,376.4	134.7	-255.9	289.2	0.80	-0.80	0.30
3,440.0	9.45	293.15	3,415.9	137.3	-262.0	295.8	0.80	-0.80	0.32
3,480.0	9.13	293.29	3,455.3	139.8	-268.0	302.3	0.80	-0.80	0.34
3,520.0	9.16	292.42	3,494.8	142.3	-273.8	308.6	0.35	0.06	-2.16
3,560.0	9.22	291.46	3,534.3	144.7	-279.7	314.9	0.42	0.16	-2.41
3,600.0	9.28	290.51	3,573.8	147.0	-285.7	321.3	0.42	0.17	-2.37
3,640.0	9.16	291.96	3,613.3	149.3	-291.7	327.7	0.66	-0.30	3.63
3,680.0	9.00	294.18	3,652.8	151.8	-297.5	334.0	0.97	-0.41	5.55
3,720.0	8.85	296.48	3,692.3	154.4	-303.2	340.2	0.97	-0.38	5.74
3,760.0	8.59	296.77	3,731.8	157.2	-308.6	346.3	0.66	-0.65	0.73
3,800.0	8.27	295.91	3,771.4	159.8	-313.8	352.1	0.86	-0.80	-2.16
3,840.0	7.95	294.97	3,811.0	162.2	-318.9	357.8	0.86	-0.80	-2.34
3,880.0	7.93	293.75	3,850.6	164.5	-323.9	363.2	0.42	-0.05	-3.04
3,920.0	8.19	292.40	3,890.2	166.7	-329.1	368.8	0.79	0.63	-3.39
3,960.0	8.44	291.13	3,929.8	168.8	-334.4	374.6	0.79	0.65	-3.18
4,000.0	8.48	289.44	3,969.4	170.9	-340.0	380.4	0.63	0.08	-4.21
4,040.0	8.17	286.92	4,008.9	172.7	-345.5	386.1	1.18	-0.75	-6.30
4,080.0	7.89	284.21	4,048.6	174.2	-350.9	391.6	1.18	-0.71	-6.77
4,120.0	7.51	283.66	4,088.2	175.4	-356.1	396.8	0.97	-0.95	-1.39
4,160.0	6.90	289.07	4,127.9	176.8	-360.9	401.7	2.27	-1.51	13.54
4,200.0	6.37	295.45	4,167.6	178.6	-365.2	406.3	2.27	-1.33	15.95
4,240.0	5.81	301.67	4,207.4	180.6	-368.9	410.6	2.16	-1.41	15.55
4,280.0	4.72	302.89	4,247.2	182.6	-372.0	414.2	2.74	-2.73	3.05
4,320.0	3.63	304.84	4,287.1	184.2	-374.5	417.1	2.74	-2.72	4.88
4,360.0	2.57	307.95	4,327.0	185.5	-376.2	419.3	2.67	-2.64	7.78
4,400.0	2.02	301.50	4,367.0	186.4	-377.5	420.9	1.51	-1.37	-16.12
4,440.0	1.52	290.56	4,407.0	187.0	-378.6	422.1	1.51	-1.26	-27.36
4,480.0	1.12	270.54	4,447.0	187.1	-379.5	423.0	1.51	-1.00	-50.06
4,520.0	1.04	271.31	4,487.0	187.1	-380.2	423.6	0.22	-0.21	1.94
4,533.0	1.02	272.38	4,500.0	187.1	-380.5	423.8	0.22	-0.16	8.22
TARGET BHL 75'FNL & 2664'FEL									
4,560.0	0.97	274.75	4,527.0	187.2	-380.9	424.3	0.22	-0.16	8.77
4,600.0	0.91	278.66	4,567.0	187.3	-381.6	424.9	0.22	-0.15	9.78
4,640.0	0.74	288.48	4,607.0	187.4	-382.2	425.4	0.56	-0.44	24.56
4,680.0	0.57	306.39	4,647.0	187.6	-382.6	425.9	0.65	-0.41	44.77
4,720.0	0.50	333.47	4,687.0	187.9	-382.8	426.2	0.65	-0.19	67.71

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Booth 28-26
Project:	SEC.26-T7N-R65W	TVD Reference:	WELL @ 4907.0ft (Original Well Elev)
Site:	Booth 4 Pad Sec.26-T7N-R65W	MD Reference:	WELL @ 4907.0ft (Original Well Elev)
Well:	Booth 28-26	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	Landmark

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,760.0	0.45	355.66	4,727.0	188.2	-382.9	426.4	0.47	-0.12	55.47
4,800.0	0.42	17.78	4,767.0	188.5	-382.9	426.6	0.42	-0.06	55.29
4,840.0	0.46	39.18	4,807.0	188.7	-382.7	426.5	0.42	0.10	53.52
4,880.0	0.55	46.61	4,847.0	189.0	-382.5	426.4	0.28	0.22	18.57
4,920.0	0.65	45.79	4,886.9	189.3	-382.2	426.3	0.24	0.24	-2.05
4,960.0	0.74	45.18	4,926.9	189.6	-381.8	426.2	0.24	0.24	-1.52
5,000.0	0.93	42.06	4,966.9	190.0	-381.4	426.0	0.48	0.47	-7.82
5,040.0	1.25	37.77	5,006.9	190.6	-380.9	425.8	0.82	0.80	-10.71
5,080.0	1.57	35.23	5,046.9	191.4	-380.3	425.7	0.82	0.81	-6.35
5,120.0	1.80	33.88	5,086.9	192.4	-379.7	425.6	0.58	0.57	-3.37
5,160.0	1.80	33.50	5,126.9	193.4	-379.0	425.4	0.03	0.00	-0.96
5,200.0	1.80	33.12	5,166.9	194.5	-378.3	425.3	0.03	0.00	-0.96
5,240.0	1.78	33.20	5,206.8	195.5	-377.6	425.2	0.06	-0.06	0.21
5,280.0	1.65	35.70	5,246.8	196.5	-376.9	425.1	0.38	-0.33	6.25
5,320.0	1.52	38.63	5,286.8	197.4	-376.3	424.9	0.38	-0.32	7.32
5,360.0	1.39	42.27	5,326.8	198.2	-375.6	424.7	0.40	-0.33	9.10
5,400.0	1.14	51.40	5,366.8	198.8	-375.0	424.4	0.80	-0.62	22.83
5,440.0	0.93	65.05	5,406.8	199.2	-374.4	424.0	0.80	-0.51	34.13
5,480.0	0.81	84.53	5,446.8	199.3	-373.8	423.6	0.80	-0.32	48.70
5,520.0	0.89	97.73	5,486.8	199.3	-373.2	423.1	0.53	0.21	32.99
5,560.0	1.02	107.51	5,526.8	199.2	-372.6	422.5	0.52	0.32	24.46
5,600.0	1.17	114.94	5,566.8	198.9	-371.8	421.7	0.52	0.38	18.58
5,640.0	1.29	106.91	5,606.8	198.6	-371.1	420.8	0.53	0.31	-20.07
5,680.0	1.45	97.30	5,646.7	198.4	-370.1	419.9	0.69	0.39	-24.03
5,720.0	1.64	89.73	5,686.7	198.3	-369.0	418.9	0.69	0.47	-18.93
5,760.0	1.72	88.74	5,726.7	198.3	-367.9	417.9	0.22	0.21	-2.49
5,800.0	1.75	90.03	5,766.7	198.4	-366.6	416.8	0.13	0.08	3.24
5,840.0	1.79	91.28	5,806.7	198.3	-365.4	415.7	0.13	0.08	3.12
5,880.0	1.72	90.08	5,846.7	198.3	-364.2	414.6	0.18	-0.16	-3.02
5,920.0	1.59	86.68	5,886.6	198.3	-363.0	413.6	0.41	-0.33	-8.49
5,960.0	1.47	82.69	5,926.6	198.4	-362.0	412.7	0.41	-0.31	-9.97
6,000.0	1.35	78.43	5,966.6	198.6	-361.0	412.0	0.39	-0.28	-10.66
6,040.0	1.25	74.01	6,006.6	198.8	-360.1	411.3	0.36	-0.25	-11.03
6,080.0	1.16	68.86	6,046.6	199.1	-359.3	410.7	0.36	-0.23	-12.90
6,120.0	1.09	64.60	6,086.6	199.4	-358.6	410.2	0.27	-0.17	-10.63
6,160.0	1.06	63.66	6,126.6	199.7	-357.9	409.8	0.09	-0.08	-2.37
6,200.0	1.03	62.65	6,166.6	200.1	-357.3	409.4	0.09	-0.08	-2.52
6,240.0	1.00	63.22	6,206.6	200.4	-356.7	409.0	0.08	-0.07	1.41
6,280.0	0.98	70.45	6,246.6	200.7	-356.0	408.5	0.31	-0.03	18.07
6,320.0	0.98	77.76	6,286.5	200.8	-355.4	408.0	0.31	0.01	18.29
6,360.0	1.00	84.01	6,326.5	200.9	-354.7	407.5	0.27	0.04	15.61
6,400.0	1.03	78.89	6,366.5	201.1	-354.0	406.9	0.23	0.06	-12.80
6,440.0	1.06	74.04	6,406.5	201.2	-353.3	406.4	0.23	0.08	-12.11
6,480.0	1.10	69.52	6,446.5	201.5	-352.6	405.8	0.23	0.10	-11.32
6,520.0	1.08	62.30	6,486.5	201.8	-351.9	405.4	0.35	-0.04	-18.04
6,560.0	1.08	54.79	6,526.5	202.2	-351.2	405.0	0.35	-0.01	-18.79
6,600.0	1.10	47.37	6,566.5	202.6	-350.6	404.7	0.35	0.04	-18.54
6,640.0	1.15	42.51	6,606.5	203.2	-350.1	404.5	0.27	0.13	-12.16
6,680.0	1.21	38.55	6,646.5	203.8	-349.5	404.3	0.26	0.16	-9.90
6,720.0	1.28	34.99	6,686.5	204.5	-349.0	404.2	0.26	0.17	-8.88
6,760.0	1.25	27.49	6,726.5	205.3	-348.6	404.1	0.42	-0.08	-18.76
6,800.0	1.20	17.37	6,766.5	206.1	-348.2	404.2	0.55	-0.12	-25.30
6,840.0	1.19	6.77	6,806.4	206.9	-348.1	404.4	0.55	-0.02	-26.48
6,880.0	1.31	3.69	6,846.4	207.7	-348.0	404.7	0.34	0.30	-7.71

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Booth 28-26
Project:	SEC.26-T7N-R65W	TVD Reference:	WELL @ 4907.0ft (Original Well Elev)
Site:	Booth 4 Pad Sec.26-T7N-R65W	MD Reference:	WELL @ 4907.0ft (Original Well Elev)
Well:	Booth 28-26	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	Landmark

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
6,920.0	1.50	5.62	6,886.4	208.7	-347.9	405.1	0.49	0.48	4.83
6,944.3	1.62	6.57	6,910.7	209.4	-347.9	405.4	0.49	0.48	3.91
TARGET CIRCLE 75'FNL & 2664'FEL									
6,960.0	1.69	7.12	6,926.4	209.8	-347.8	405.5	0.49	0.48	3.46
7,000.0	1.89	8.57	6,966.4	211.0	-347.6	406.0	0.49	0.48	3.63
7,040.0	2.08	10.05	7,006.4	212.4	-347.4	406.4	0.50	0.48	3.70
7,080.0	2.27	11.28	7,046.3	213.9	-347.1	406.9	0.50	0.48	3.08
7,120.0	2.45	11.17	7,086.3	215.5	-346.8	407.3	0.45	0.45	-0.28
7,160.0	2.61	8.82	7,126.3	217.3	-346.5	407.9	0.47	0.40	-5.87
7,200.0	2.77	6.75	7,166.2	219.1	-346.2	408.5	0.47	0.41	-5.19
7,240.0	2.85	5.18	7,206.2	221.1	-346.0	409.3	0.27	0.19	-3.92
7,280.0	2.62	4.58	7,246.1	223.0	-345.9	410.0	0.57	-0.56	-1.50
7,320.0	2.40	3.86	7,286.1	224.7	-345.7	410.7	0.57	-0.56	-1.79
7,360.0	2.17	3.00	7,326.1	226.3	-345.6	411.4	0.57	-0.56	-2.15
HARDLINE 75'N OF BHL									

Checked By: _____ Approved By: _____ Date: _____