

NOBLE ENERGY INC.
ALLES FEDERAL 34-22
SWSE 22-4N-66W
460' FSL & 1780' FEL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
1/13/2014

API: 05-123-14524
 COGCC #


GL Elev: 4734'
 KB Elev: 4747'

Spud Date: 12/31/1989

Surface Casing :
 8 5/8" 24# @ 226'
 Cement: 120 sx
 TOC: Surface

TOC @ 6590'

Production Casing :
 3 1/2" 9.3# @ 7343'
 Cement: 210 sx
 TD: 1/7/1990

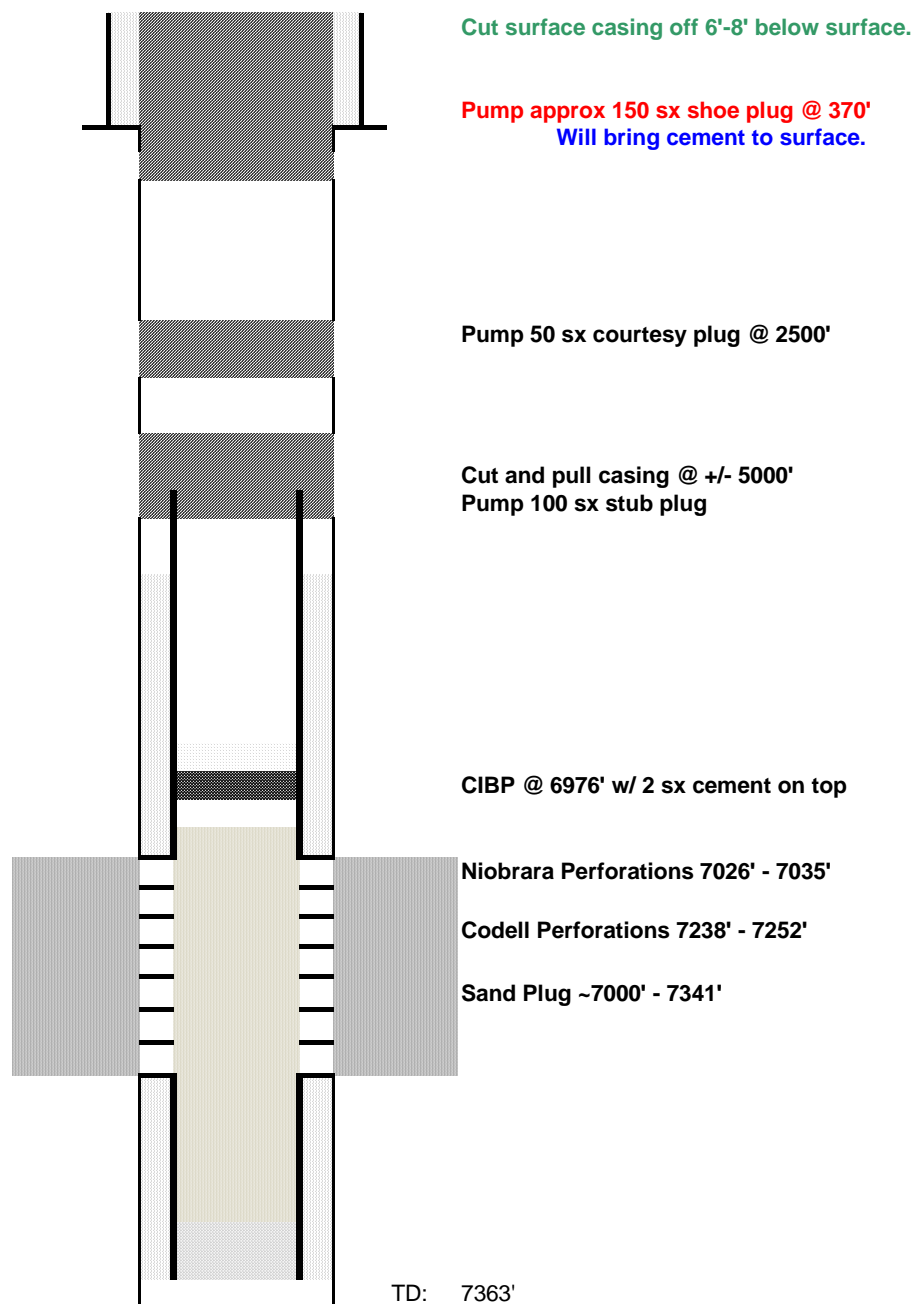

Cut surface casing off 6'-8' below surface.

Pump approx 150 sx shoe plug @ 370'
 Will bring cement to surface.

Pump 50 sx courtesy plug @ 2500'

Cut and pull casing @ +/- 5000'
 Pump 100 sx stub plug

CIBP @ 6976' w/ 2 sx cement on top

Niobrara Perforations 7026' - 7035'

Codell Perforations 7238' - 7252'

Sand Plug ~7000' - 7341'

TD: 7363'