

NOBLE ENERGY INC.
 Larson A25-01
 NENE 25-6N-64W
 779' FNL & 659' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/10/2016

API: 05-123-14701
 COGCC #

GL Elev: 4641
 KB Elev: 4651


Spud Date: 9/22/1990

Surface Casing :
 8 5/8" 24# @ 273'
 Cement: 275 sx
 TOC: Surface

TOC @ 6066

Nio Top 6477

Production Casing :
 2 7/8" 6.5# @ 6948
 Cement: 280 sx
 TD: 6949

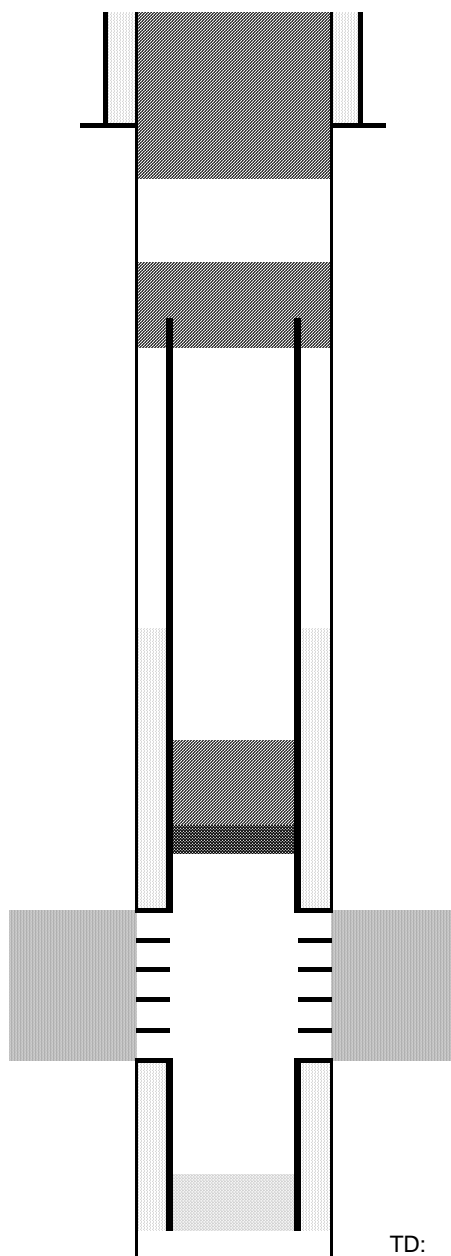

Cut surface casing off 6'-8' below surface.

Pump approx 255 sx shoe plug @ 850'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 20 sx of cement on top of CIBP

CIBP @ 6727'

Codell Perforations 6777' TO 6789'

TD: 6949