

NOBLE ENERGY INC.

Buckmur #B02-25

NESW 2-5N-64W

1357' FSL & 1318' FWL

WELD COUNTY, CO

Wattenberg

CURRENT WELLBORE SCHEMATIC W/ PROPOSED P&A

3/22/2016


API: 05-123-23290
COGCC #

Spud Date: 10/24/2005

GL Elev: 4612'
KB Elev: 4624'

Surface Casing :

8.625" 24# (Grade ?) SET AT 589'
Cement: 445 sx
TOC: Surface



Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug at 689'

198 sx out & 52 sx in

Will bring cement to surface.

Surface Casing = 589' + 100' = 689'

Deepest water well perf = 505' + 150' = 655'

Fox Hills = 173' + 150' = 323'

Shoot holes at 2500' & 689'

Set CICR at 2400' and cement with: 95 sx
80 sx out & 15 sx in

No Sussex Production within a mile

TOC @ 3092
NIO Top @ 6450
Codell Top @ 6750


Set CIBP @ 6428 w/ 2 sx cement

NIOBRARA Perforations 6478' - 6598'

CODELL Perforations 6762' - 6776'

Production Casing :

4.5" 11.6# N-80 SET AT 6883'
Cement: 630 sx
TD: 10/28/2005

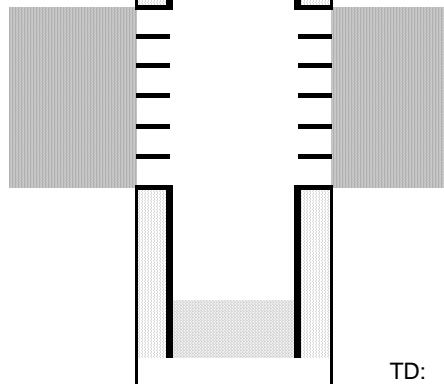

TD: 6900'