

NOBLE ENERGY INC.
DCD FARM A26-02
NWNE 26-6N-64W
760' FNL & 1990' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/16/2016

API: 05-123-26387
COGCC #

GL Elev: 4633'
KB Elev: 4645'


Spud Date: 1/20/2008

Surface Casing :
8 5/8" 24# J-55 @ 829'
Cement: 403 sx
TOC: Surface

TOC @ 1640'

Nio Top @ 6521'

Production Casing :
4 1/2" 11.6# M-80 @ 6967'
Cement: 910 sx
TD: 6998'

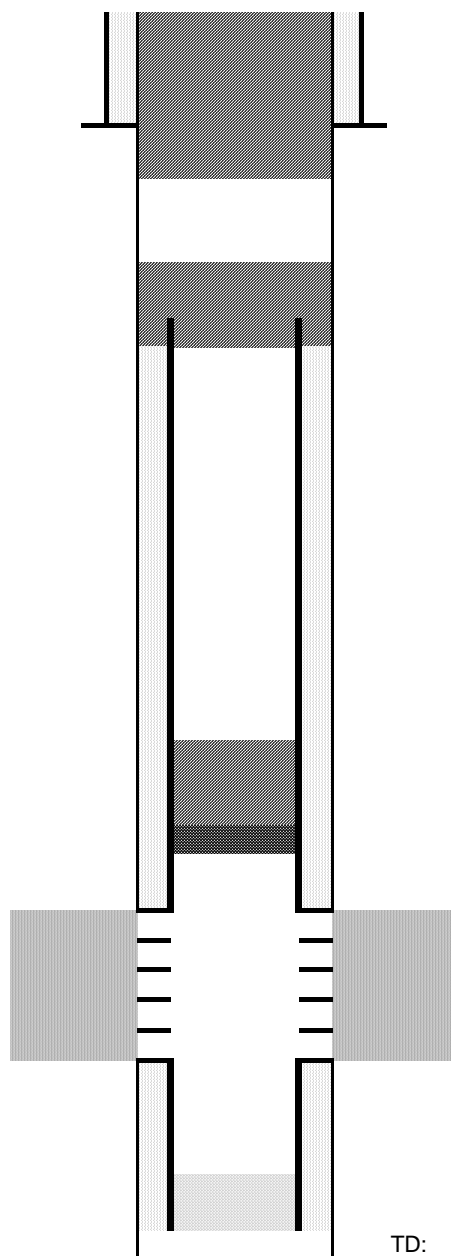

Cut surface casing off 6'-8' below surface.

Pump approx 300 sx shoe plug @ 950'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 1640'

Pump 30 sx cement on top of CIBP

CIBP @ 6755'

Codell Perforations 6805' to 6818'

TD: 6998'