



ConocoPhillips

Arapahoe County, Colorado

Chico 4-65 26-25 2CH



Design B

Ground Level: 5791.30
Surface Location Latitude: 39° 40' 33.840 N
Surface Location Longitude: 104° 38' 20.560 W
North Reference: True
25' RKB @ 5816.30ft (25' RKB)

North American Datum 1983
GRS 1980
US State Plane 1983
Colorado Central Zone

Well Profile Data

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5316.60	0.00	0.00	5316.60	0.00	0.00	0.00	0.00
7099.73	26.75	269.55	7035.67	-3.20	-408.69	1.50	-408.64
7146.48	26.75	269.55	7077.42	-3.37	-429.73	0.00	-429.68
8319.50	90.58	90.45	7908.00	-14.14	87.57	10.00	87.70
17914.98	90.58	90.45	7811.00	-90.22	9682.27	0.00	9682.69

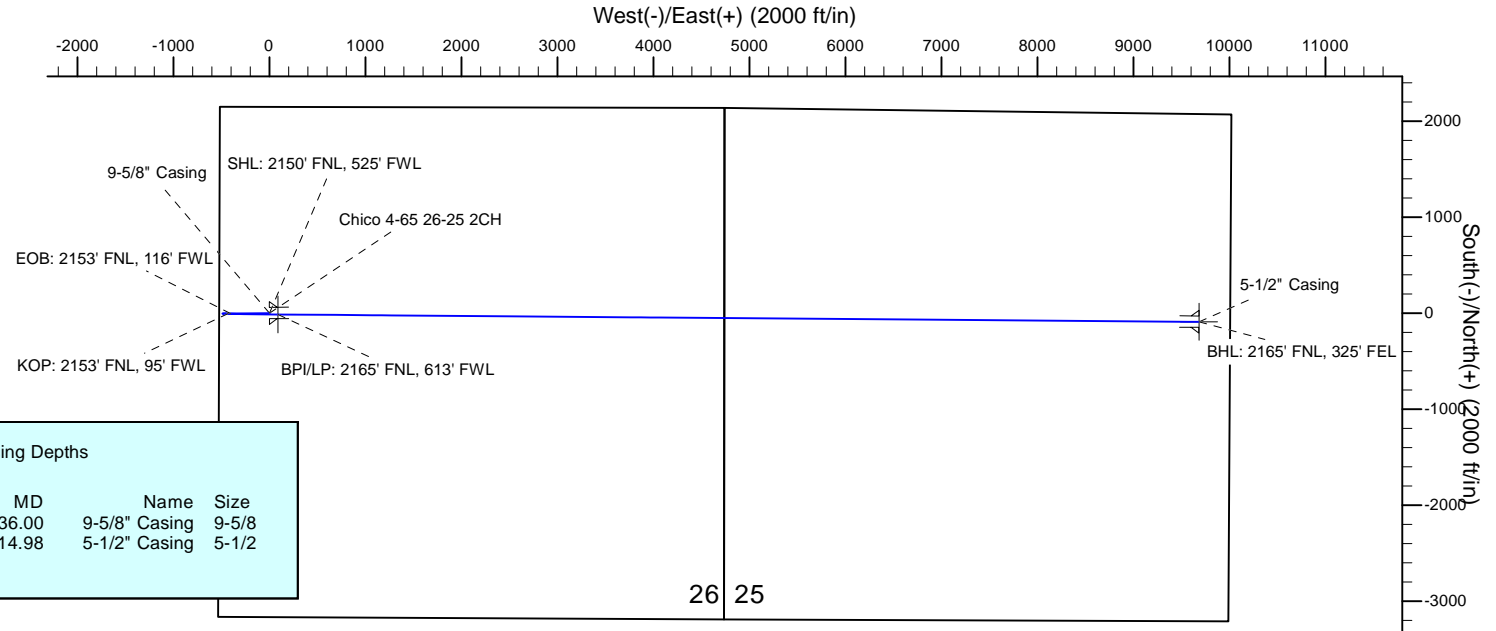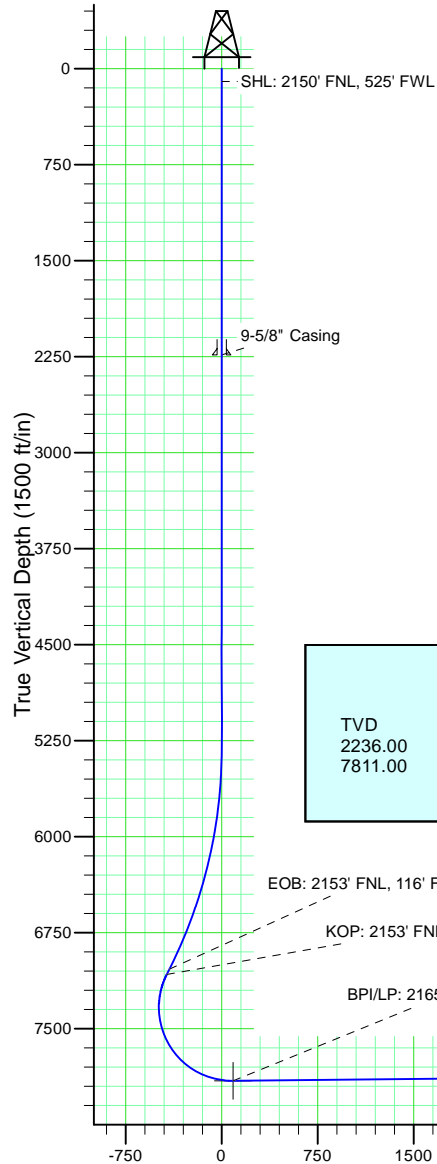

Casing Depths

TVD	MD	Name	Size
2236.00	2236.00	9-5/8" Casing	9-5/8
7811.00	17914.98	5-1/2" Casing	5-1/2

26 25

Wellbore Targets

Name	TVD	Latitude	Longitude
Chico 4-65 26-25 2CH BHL	7811.00	39° 40' 32.930 N	104° 36' 16.730 W
Chico 4-65 26-25 2CH BPI	7908.00	39° 40' 33.700 N	104° 38' 19.440 W

ConocoPhillips RBU Gold Data

Niobrara Central Zone

Chico

Chico 4-65 26-25 2CH

Chico 4-65 26-25 2CH

Plan: Design B

Standard Planning Report

26 April, 2018



ConocoPhillips

Arapahoe County, Colorado

Chico 4-65 26-25 2CH


Design B

Ground Level: 5791.30
Surface Location Latitude: 39° 40' 33.840 N
Surface Location Longitude: 104° 38' 20.560 W
North Reference: True
25' RKB @ 5816.30ft (25' RKB)

North American Datum 1983
GRS 1980
US State Plane 1983
Colorado Central Zone

Well Profile Data

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5316.60	0.00	0.00	5316.60	0.00	0.00	0.00	0.00
7099.73	26.75	269.55	7035.67	-3.20	-408.69	1.50	-408.64
7146.48	26.75	269.55	7077.42	-3.37	-429.73	0.00	-429.68
8319.50	90.58	90.45	7908.00	-14.14	87.57	10.00	87.70
17914.98	90.58	90.45	7811.00	-90.22	9682.27	0.00	9682.69

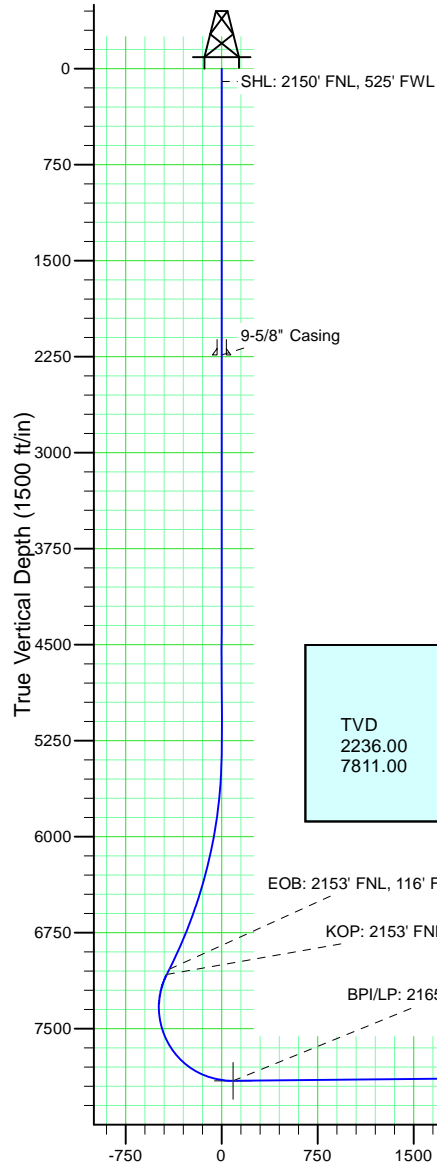

Casing Depths

TVD	MD	Name	Size
2236.00	2236.00	9-5/8" Casing	9-5/8
7811.00	17914.98	5-1/2" Casing	5-1/2

Wellbore Targets

Name	TVD	Latitude	Longitude
Chico 4-65 26-25 2CH BHL	7811.00	39° 40' 32.930 N	104° 36' 16.730 W
Chico 4-65 26-25 2CH BPI	7908.00	39° 40' 33.700 N	104° 38' 19.440 W

Vertical Section at 90.53° (1500 ft/in)

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Project	Niobrara Central Zone, Colorado Central Zone, FIPS Zone: 0502		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		Using geodetic scale factor

Site		Chico			
Site Position: From: Position Uncertainty:	Lat/Long	Northing:	1,674,430.510 usft	Latitude:	39° 40' 55.099 N
		Easting:	3,241,798.168 usft	Longitude:	104° 38' 27.190 W
		Slot Radius:	13-3/16 "	Grid Convergence:	0.54

Well	Chico 4-65 26-25 2CH					
Well Position	+N-S	-2,151.14 ft	Northing:	1,672,284.403 usft	Latitude:	39° 40' 33.840 N
	+E-W	518.37 ft	Easting:	3,242,336.845 usft	Longitude:	104° 38' 20.560 W
Position Uncertainty		0.00 ft	Wellhead Elevation:	5,791.30 ft	Ground Level:	5,791.30 ft

Wellbore	Chico 4-65 26-25 2CH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2017	12/1/2018	8.14	66.28	51,840.59535993

Design	Design B			
Audit Notes:				
Version:	0	Phase:	PLAN	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	90.53

Plan Survey Tool Program	Date	4/26/2018			
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	2,236.00	Design B (Chico 4-65 26-25 2CH Gyro-BM-MS		
			Gyro - bat/mem drop m/s		
2	2,236.00	5,316.60	Design B (Chico 4-65 26-25 2CH MWD+IFR_No SAG		
			MWD + IFR (No SAG) corre		
3	5,316.60	7,099.73	Design B (Chico 4-65 26-25 2CH MWD+IFR_No SAG		
			MWD + IFR (No SAG) corre		
4	7,099.73	7,146.48	Design B (Chico 4-65 26-25 2CH MWD+IFR_No SAG		
			MWD + IFR (No SAG) corre		
5	7,146.48	8,319.50	Design B (Chico 4-65 26-25 2CH MWD+IFR_No SAG		
			MWD + IFR (No SAG) corre		
6	8,319.50	17,914.98	Design B (Chico 4-65 26-25 2CH MWD+IFR_No SAG		
			MWD + IFR (No SAG) corre		

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,316.60	0.00	0.00	5,316.60	0.00	0.00	0.00	0.00	0.00	0.00	
7,099.73	26.75	269.55	7,035.67	-3.20	-408.69	1.50	1.50	0.00	269.55	
7,146.48	26.75	269.55	7,077.42	-3.37	-429.73	0.00	0.00	0.00	0.00	
8,319.50	90.58	90.45	7,908.00	-14.14	87.57	10.00	5.44	-15.27	-178.98	Chico 4-65 26-25 2CH
17,914.98	90.58	90.45	7,811.00	-90.22	9,682.27	0.00	0.00	0.00	0.00	Chico 4-65 26-25 2CH

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL: 2150' FNL, 525' FWL									
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,841.00	0.00	0.00	1,841.00	0.00	0.00	0.00	0.00	0.00	0.00
Fox Hills Top									
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,036.00	0.00	0.00	2,036.00	0.00	0.00	0.00	0.00	0.00	0.00
Pierre Top - Fox Hills Base									
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,236.00	0.00	0.00	2,236.00	0.00	0.00	0.00	0.00	0.00	0.00
Surface Casing - 9-5/8" Casing									
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00
5,316.60	0.00	0.00	5,316.60	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	1.25	269.55	5,399.99	-0.01	-0.91	-0.91	1.50	1.50	0.00
5,500.00	2.75	269.55	5,499.93	-0.03	-4.40	-4.40	1.50	1.50	0.00
5,600.00	4.25	269.55	5,599.74	-0.08	-10.51	-10.51	1.50	1.50	0.00
5,700.00	5.75	269.55	5,699.36	-0.15	-19.22	-19.22	1.50	1.50	0.00
5,800.00	7.25	269.55	5,798.71	-0.24	-30.55	-30.54	1.50	1.50	0.00
5,900.00	8.75	269.55	5,897.73	-0.35	-44.46	-44.46	1.50	1.50	0.00
6,000.00	10.25	269.55	5,996.36	-0.48	-60.97	-60.96	1.50	1.50	0.00
6,100.00	11.75	269.55	6,094.52	-0.63	-80.05	-80.04	1.50	1.50	0.00
6,200.00	13.25	269.55	6,192.15	-0.80	-101.70	-101.68	1.50	1.50	0.00
6,300.00	14.75	269.55	6,289.17	-0.99	-125.89	-125.87	1.50	1.50	0.00
6,400.00	16.25	269.55	6,385.53	-1.20	-152.61	-152.59	1.50	1.50	0.00
6,500.00	17.75	269.55	6,481.16	-1.43	-181.85	-181.83	1.50	1.50	0.00
6,600.00	19.25	269.55	6,575.99	-1.67	-213.58	-213.55	1.50	1.50	0.00
6,700.00	20.75	269.55	6,669.95	-1.94	-247.78	-247.75	1.50	1.50	0.00
6,800.00	22.25	269.55	6,762.99	-2.23	-284.43	-284.40	1.50	1.50	0.00
6,900.00	23.75	269.55	6,855.04	-2.54	-323.50	-323.47	1.50	1.50	0.00
7,000.00	25.25	269.55	6,946.03	-2.86	-364.97	-364.93	1.50	1.50	0.00
7,099.73	26.75	269.55	7,035.67	-3.20	-408.69	-408.64	1.50	1.50	0.00
EOB: 2153' FNL, 116' FWL									
7,146.48	26.75	269.55	7,077.42	-3.37	-429.73	-429.68	0.00	0.00	0.00
KOP: 2153' FNL, 95' FWL									
7,150.00	26.40	269.54	7,080.56	-3.38	-431.30	-431.25	9.99	-9.99	-0.40
7,200.00	21.40	269.29	7,126.26	-3.58	-451.55	-451.49	10.00	-10.00	-0.49
7,250.00	16.40	268.90	7,173.55	-3.83	-467.73	-467.68	10.00	-10.00	-0.77
7,300.00	11.40	268.19	7,222.08	-4.12	-479.73	-479.67	10.00	-10.00	-1.43
7,350.00	6.40	266.38	7,271.46	-4.45	-487.46	-487.40	10.00	-9.99	-3.62
7,400.00	1.46	252.21	7,321.33	-4.83	-490.85	-490.78	10.00	-9.89	-28.34
7,450.00	3.64	97.67	7,371.30	-5.23	-489.88	-489.81	10.00	4.36	-309.08
7,500.00	8.63	93.48	7,421.00	-5.67	-484.56	-484.49	10.00	9.97	-8.38
7,550.00	13.62	92.35	7,470.04	-6.14	-474.93	-474.85	10.00	9.99	-2.26
7,600.00	18.62	91.82	7,518.06	-6.64	-461.06	-460.98	10.00	10.00	-1.06
7,650.00	23.62	91.51	7,564.69	-7.15	-443.05	-442.97	10.00	10.00	-0.62
7,700.00	28.62	91.30	7,609.56	-7.69	-421.05	-420.96	10.00	10.00	-0.42
7,750.00	33.62	91.15	7,652.35	-8.24	-395.22	-395.13	10.00	10.00	-0.30
7,800.00	38.62	91.03	7,692.73	-8.79	-365.76	-365.67	10.00	10.00	-0.23
7,850.00	43.62	90.94	7,730.38	-9.36	-332.90	-332.79	10.00	10.00	-0.19
7,900.00	48.62	90.86	7,765.03	-9.92	-296.87	-296.76	10.00	10.00	-0.15
7,937.70	52.39	90.81	7,789.00	-10.35	-267.78	-267.68	10.00	10.00	-0.13
Niobrara Top									
7,950.00	53.62	90.80	7,796.40	-10.49	-257.96	-257.85	10.00	10.00	-0.13
8,000.00	58.62	90.74	7,824.26	-11.04	-216.47	-216.35	10.00	10.00	-0.12
8,050.00	63.63	90.69	7,848.40	-11.58	-172.70	-172.58	10.00	10.00	-0.10
8,100.00	68.63	90.64	7,868.63	-12.11	-126.99	-126.88	10.00	10.00	-0.10
8,150.00	73.63	90.59	7,884.80	-12.62	-79.70	-79.58	10.00	10.00	-0.09
8,200.00	78.63	90.55	7,896.78	-13.10	-31.18	-31.05	10.00	10.00	-0.08

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,206.35	79.26	90.55	7,898.00	-13.16	-24.94	-24.82	10.00	10.00	-0.08
C Chalk Top									
8,250.00	83.63	90.51	7,904.49	-13.56	18.21	18.33	10.00	10.00	-0.08
8,300.00	88.63	90.47	7,907.87	-13.99	68.08	68.20	10.00	10.00	-0.08
8,319.50	90.58	90.45	7,908.00	-14.14	87.57	87.70	10.00	10.00	-0.08
BPI/LP: 2165' FNL, 613' FWL									
8,400.00	90.58	90.45	7,907.19	-14.78	168.07	168.20	0.00	0.00	0.00
8,500.00	90.58	90.45	7,906.18	-15.58	268.06	268.19	0.00	0.00	0.00
8,600.00	90.58	90.45	7,905.16	-16.37	368.05	368.19	0.00	0.00	0.00
8,700.00	90.58	90.45	7,904.15	-17.16	468.04	468.18	0.00	0.00	0.00
8,800.00	90.58	90.45	7,903.14	-17.95	568.03	568.18	0.00	0.00	0.00
8,900.00	90.58	90.45	7,902.13	-18.75	668.03	668.17	0.00	0.00	0.00
9,000.00	90.58	90.45	7,901.12	-19.54	768.02	768.17	0.00	0.00	0.00
9,100.00	90.58	90.45	7,900.11	-20.33	868.01	868.16	0.00	0.00	0.00
9,200.00	90.58	90.45	7,899.10	-21.12	968.00	968.16	0.00	0.00	0.00
9,300.00	90.58	90.45	7,898.09	-21.92	1,067.99	1,068.15	0.00	0.00	0.00
9,400.00	90.58	90.45	7,897.08	-22.71	1,167.98	1,168.14	0.00	0.00	0.00
9,500.00	90.58	90.45	7,896.07	-23.50	1,267.98	1,268.14	0.00	0.00	0.00
9,600.00	90.58	90.45	7,895.06	-24.30	1,367.97	1,368.13	0.00	0.00	0.00
9,700.00	90.58	90.45	7,894.04	-25.09	1,467.96	1,468.13	0.00	0.00	0.00
9,800.00	90.58	90.45	7,893.03	-25.88	1,567.95	1,568.12	0.00	0.00	0.00
9,900.00	90.58	90.45	7,892.02	-26.67	1,667.94	1,668.12	0.00	0.00	0.00
10,000.00	90.58	90.45	7,891.01	-27.47	1,767.93	1,768.11	0.00	0.00	0.00
10,100.00	90.58	90.45	7,890.00	-28.26	1,867.93	1,868.11	0.00	0.00	0.00
10,200.00	90.58	90.45	7,888.99	-29.05	1,967.92	1,968.10	0.00	0.00	0.00
10,300.00	90.58	90.45	7,887.98	-29.85	2,067.91	2,068.10	0.00	0.00	0.00
10,400.00	90.58	90.45	7,886.97	-30.64	2,167.90	2,168.09	0.00	0.00	0.00
10,500.00	90.58	90.45	7,885.96	-31.43	2,267.89	2,268.09	0.00	0.00	0.00
10,600.00	90.58	90.45	7,884.95	-32.22	2,367.88	2,368.08	0.00	0.00	0.00
10,700.00	90.58	90.45	7,883.94	-33.02	2,467.88	2,468.08	0.00	0.00	0.00
10,800.00	90.58	90.45	7,882.92	-33.81	2,567.87	2,568.07	0.00	0.00	0.00
10,900.00	90.58	90.45	7,881.91	-34.60	2,667.86	2,668.07	0.00	0.00	0.00
11,000.00	90.58	90.45	7,880.90	-35.40	2,767.85	2,768.06	0.00	0.00	0.00
11,100.00	90.58	90.45	7,879.89	-36.19	2,867.84	2,868.06	0.00	0.00	0.00
11,200.00	90.58	90.45	7,878.88	-36.98	2,967.84	2,968.05	0.00	0.00	0.00
11,300.00	90.58	90.45	7,877.87	-37.77	3,067.83	3,068.05	0.00	0.00	0.00
11,400.00	90.58	90.45	7,876.86	-38.57	3,167.82	3,168.04	0.00	0.00	0.00
11,500.00	90.58	90.45	7,875.85	-39.36	3,267.81	3,268.04	0.00	0.00	0.00
11,600.00	90.58	90.45	7,874.84	-40.15	3,367.80	3,368.03	0.00	0.00	0.00
11,700.00	90.58	90.45	7,873.83	-40.95	3,467.79	3,468.03	0.00	0.00	0.00
11,800.00	90.58	90.45	7,872.82	-41.74	3,567.79	3,568.02	0.00	0.00	0.00
11,900.00	90.58	90.45	7,871.81	-42.53	3,667.78	3,668.01	0.00	0.00	0.00
12,000.00	90.58	90.45	7,870.79	-43.32	3,767.77	3,768.01	0.00	0.00	0.00
12,100.00	90.58	90.45	7,869.78	-44.12	3,867.76	3,868.00	0.00	0.00	0.00
12,200.00	90.58	90.45	7,868.77	-44.91	3,967.75	3,968.00	0.00	0.00	0.00
12,300.00	90.58	90.45	7,867.76	-45.70	4,067.74	4,067.99	0.00	0.00	0.00
12,400.00	90.58	90.45	7,866.75	-46.50	4,167.74	4,167.99	0.00	0.00	0.00
12,500.00	90.58	90.45	7,865.74	-47.29	4,267.73	4,267.98	0.00	0.00	0.00
12,600.00	90.58	90.45	7,864.73	-48.08	4,367.72	4,367.98	0.00	0.00	0.00
12,700.00	90.58	90.45	7,863.72	-48.87	4,467.71	4,467.97	0.00	0.00	0.00
12,800.00	90.58	90.45	7,862.71	-49.67	4,567.70	4,567.97	0.00	0.00	0.00
12,900.00	90.58	90.45	7,861.70	-50.46	4,667.70	4,667.96	0.00	0.00	0.00
13,000.00	90.58	90.45	7,860.69	-51.25	4,767.69	4,767.96	0.00	0.00	0.00
13,100.00	90.58	90.45	7,859.67	-52.05	4,867.68	4,867.95	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
13,200.00	90.58	90.45	7,858.66	-52.84	4,967.67	4,967.95	0.00	0.00	0.00
13,300.00	90.58	90.45	7,857.65	-53.63	5,067.66	5,067.94	0.00	0.00	0.00
13,400.00	90.58	90.45	7,856.64	-54.42	5,167.65	5,167.94	0.00	0.00	0.00
13,500.00	90.58	90.45	7,855.63	-55.22	5,267.65	5,267.93	0.00	0.00	0.00
13,600.00	90.58	90.45	7,854.62	-56.01	5,367.64	5,367.93	0.00	0.00	0.00
13,700.00	90.58	90.45	7,853.61	-56.80	5,467.63	5,467.92	0.00	0.00	0.00
13,800.00	90.58	90.45	7,852.60	-57.59	5,567.62	5,567.92	0.00	0.00	0.00
13,900.00	90.58	90.45	7,851.59	-58.39	5,667.61	5,667.91	0.00	0.00	0.00
14,000.00	90.58	90.45	7,850.58	-59.18	5,767.60	5,767.91	0.00	0.00	0.00
14,100.00	90.58	90.45	7,849.57	-59.97	5,867.60	5,867.90	0.00	0.00	0.00
14,200.00	90.58	90.45	7,848.55	-60.77	5,967.59	5,967.90	0.00	0.00	0.00
14,300.00	90.58	90.45	7,847.54	-61.56	6,067.58	6,067.89	0.00	0.00	0.00
14,400.00	90.58	90.45	7,846.53	-62.35	6,167.57	6,167.88	0.00	0.00	0.00
14,500.00	90.58	90.45	7,845.52	-63.14	6,267.56	6,267.88	0.00	0.00	0.00
14,600.00	90.58	90.45	7,844.51	-63.94	6,367.55	6,367.87	0.00	0.00	0.00
14,700.00	90.58	90.45	7,843.50	-64.73	6,467.55	6,467.87	0.00	0.00	0.00
14,800.00	90.58	90.45	7,842.49	-65.52	6,567.54	6,567.86	0.00	0.00	0.00
14,900.00	90.58	90.45	7,841.48	-66.32	6,667.53	6,667.86	0.00	0.00	0.00
15,000.00	90.58	90.45	7,840.47	-67.11	6,767.52	6,767.85	0.00	0.00	0.00
15,100.00	90.58	90.45	7,839.46	-67.90	6,867.51	6,867.85	0.00	0.00	0.00
15,200.00	90.58	90.45	7,838.45	-68.69	6,967.51	6,967.84	0.00	0.00	0.00
15,300.00	90.58	90.45	7,837.43	-69.49	7,067.50	7,067.84	0.00	0.00	0.00
15,400.00	90.58	90.45	7,836.42	-70.28	7,167.49	7,167.83	0.00	0.00	0.00
15,500.00	90.58	90.45	7,835.41	-71.07	7,267.48	7,267.83	0.00	0.00	0.00
15,600.00	90.58	90.45	7,834.40	-71.87	7,367.47	7,367.82	0.00	0.00	0.00
15,700.00	90.58	90.45	7,833.39	-72.66	7,467.46	7,467.82	0.00	0.00	0.00
15,800.00	90.58	90.45	7,832.38	-73.45	7,567.46	7,567.81	0.00	0.00	0.00
15,900.00	90.58	90.45	7,831.37	-74.24	7,667.45	7,667.81	0.00	0.00	0.00
16,000.00	90.58	90.45	7,830.36	-75.04	7,767.44	7,767.80	0.00	0.00	0.00
16,100.00	90.58	90.45	7,829.35	-75.83	7,867.43	7,867.80	0.00	0.00	0.00
16,200.00	90.58	90.45	7,828.34	-76.62	7,967.42	7,967.79	0.00	0.00	0.00
16,300.00	90.58	90.45	7,827.33	-77.42	8,067.41	8,067.79	0.00	0.00	0.00
16,400.00	90.58	90.45	7,826.32	-78.21	8,167.41	8,167.78	0.00	0.00	0.00
16,500.00	90.58	90.45	7,825.30	-79.00	8,267.40	8,267.78	0.00	0.00	0.00
16,600.00	90.58	90.45	7,824.29	-79.79	8,367.39	8,367.77	0.00	0.00	0.00
16,700.00	90.58	90.45	7,823.28	-80.59	8,467.38	8,467.77	0.00	0.00	0.00
16,800.00	90.58	90.45	7,822.27	-81.38	8,567.37	8,567.76	0.00	0.00	0.00
16,900.00	90.58	90.45	7,821.26	-82.17	8,667.37	8,667.75	0.00	0.00	0.00
17,000.00	90.58	90.45	7,820.25	-82.97	8,767.36	8,767.75	0.00	0.00	0.00
17,100.00	90.58	90.45	7,819.24	-83.76	8,867.35	8,867.74	0.00	0.00	0.00
17,200.00	90.58	90.45	7,818.23	-84.55	8,967.34	8,967.74	0.00	0.00	0.00
17,300.00	90.58	90.45	7,817.22	-85.34	9,067.33	9,067.73	0.00	0.00	0.00
17,400.00	90.58	90.45	7,816.21	-86.14	9,167.32	9,167.73	0.00	0.00	0.00
17,500.00	90.58	90.45	7,815.20	-86.93	9,267.32	9,267.72	0.00	0.00	0.00
17,600.00	90.58	90.45	7,814.18	-87.72	9,367.31	9,367.72	0.00	0.00	0.00
17,700.00	90.58	90.45	7,813.17	-88.52	9,467.30	9,467.71	0.00	0.00	0.00
17,800.00	90.58	90.45	7,812.16	-89.31	9,567.29	9,567.71	0.00	0.00	0.00
17,900.00	90.58	90.45	7,811.15	-90.10	9,667.28	9,667.70	0.00	0.00	0.00
17,914.98	90.58	90.45	7,811.00	-90.22	9,682.26	9,682.68	0.00	0.00	0.00
BHL: 2165' FNL, 325' FEL - 5-1/2" Casing									

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Chico 4-65 26-25 2CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5816.30ft (25' RKB)
Project:	Niobrara Central Zone	MD Reference:	25' RKB @ 5816.30ft (25' RKB)
Site:	Chico	North Reference:	True
Well:	Chico 4-65 26-25 2CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Chico 4-65 26-25 2CH		
Design:	Design B		

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Chico 4-65 26-25 2CH - plan hits target center - Point	0.00	0.00	7,811.00	-90.22	9,682.27	1,672,285.946	3,252,019.377	39° 40' 32.930 N	104° 36' 16.730 W
Chico 4-65 26-25 2CH - plan hits target center - Point	0.00	0.00	7,908.00	-14.14	87.57	1,672,271.090	3,242,424.546	39° 40' 33.700 N	104° 38' 19.440 W

Casing Points

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")
2,236.00	2,236.00	9-5/8" Casing	9-5/8	12-1/4
17,914.98	7,811.00	5-1/2" Casing	5-1/2	8-1/2

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,841.00	1,841.00	Fox Hills Top		0.00	
2,036.00	2,036.00	Pierre Top - Fox Hills Base		0.00	
2,236.00	2,236.00	Surface Casing		0.00	
7,937.70	7,789.00	Niobrara Top		0.00	
8,206.35	7,898.00	C Chalk Top		0.00	

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
100.00	100.00	0.00	0.00	SHL: 2150' FNL, 525' FWL
7,099.73	7,035.67	-3.20	-408.69	EOB: 2153' FNL, 116' FWL
7,146.48	7,077.42	-3.37	-429.73	KOP: 2153' FNL, 95' FWL
8,319.50	7,908.00	-14.14	87.57	BPI/LP: 2165' FNL, 613' FWL
17,914.98	7,811.00	-90.22	9,682.26	BHL: 2165' FNL, 325' FEL